


T5 LKD Batten Display lighting

- The T5 LKD Batten is dimmable with DSI, DALI or 1-10v protocols and can be supplied with Emergency conversions incorporated within the 28w / 54w and 35w / 49w versions.



EncapSulite
Australia

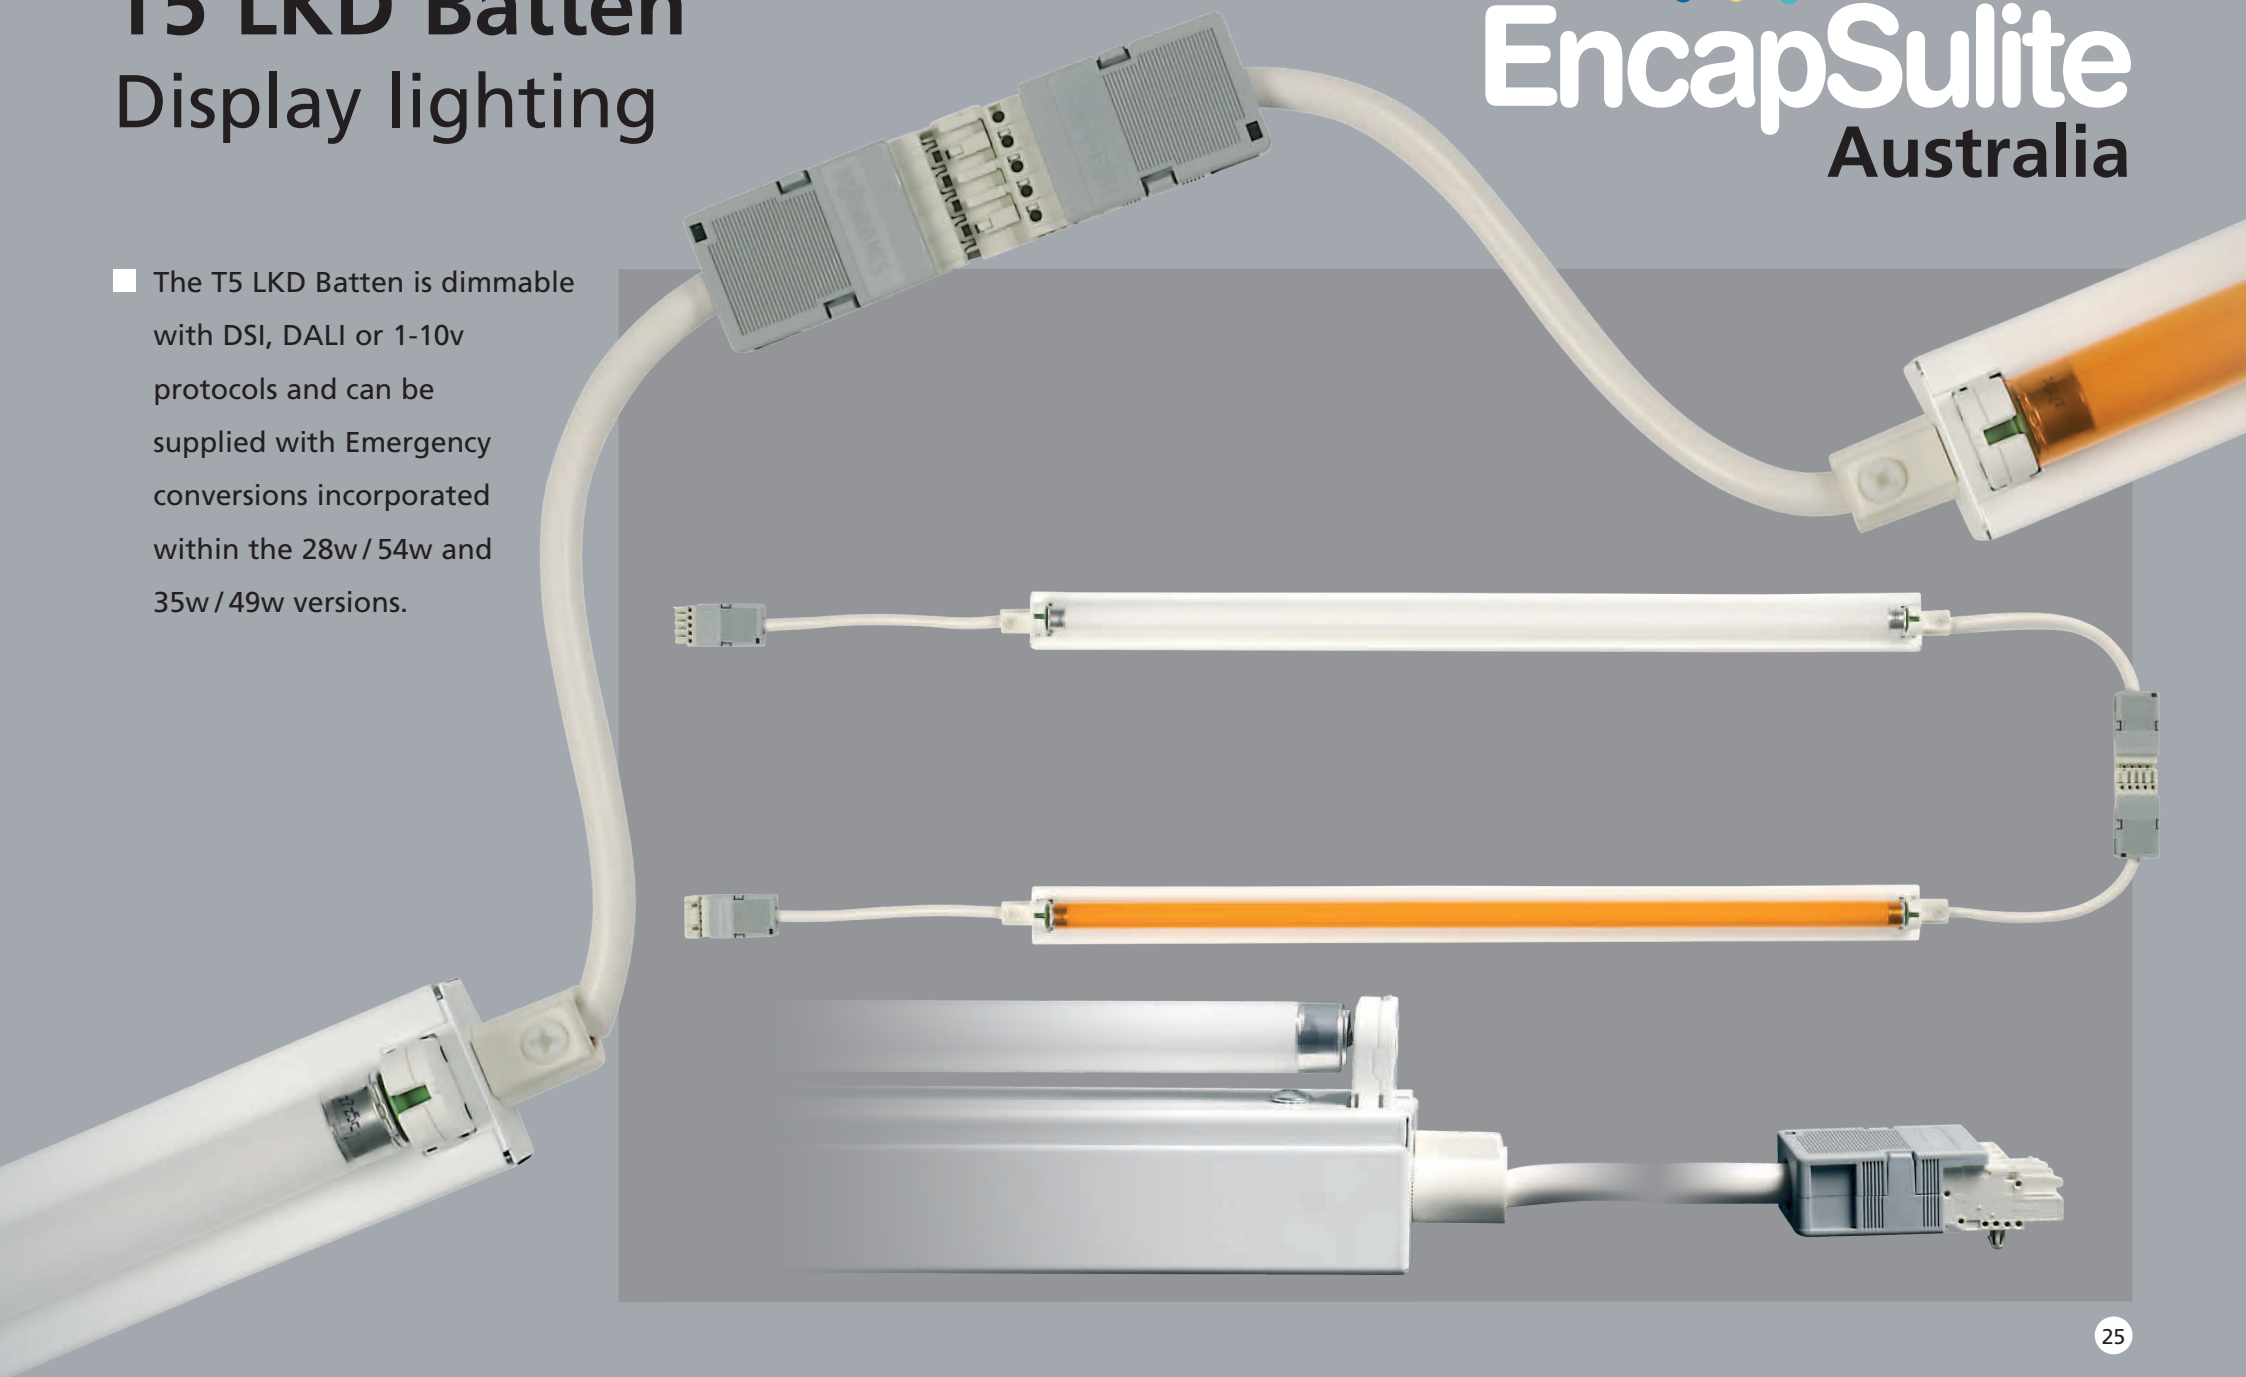

T5 LKD Batten Display lighting

TECHNICAL INFORMATION

LAMP

T5 triphosphor colour 840 as standard, other colour temperatures to order. Typical lamp life T5 20,000 hrs, longer life lamps available as cost option.

FIXING

2 screws through the fitting, (not included).

COLOURS


Any lamp colour or our DDP coloured sleeves (guaranteed fade free) can be specified. Ice blue, sky blue, royal blue, purple, lavender, candy pink, pink, light red, red, orange, light orange, chrome green, leaf green, acid yellow and candlelight. Other filter colours available but not guaranteed fade free.

CONSTRUCTION

Powder coated white steel box section, HF electronic ballast.

WIRING AND CONNECTIONS

All internal wiring 1mm and 1.5mm solid. External wiring if supplied 1.5mm three core PVC.

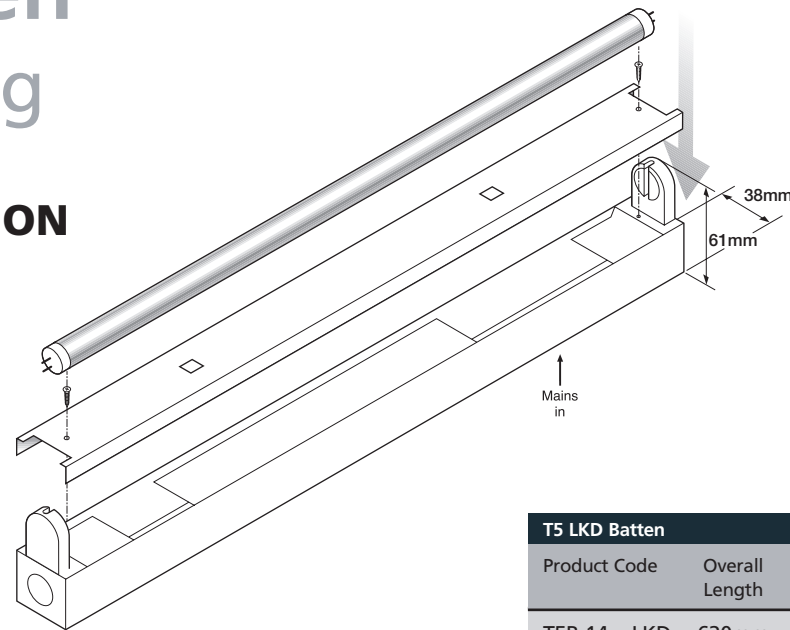

OPERATION TEMPERATURE


-20c – +50c Please note lamps will run at reduced light output in colder temperatures.

STANDARDS

Complies with CE for Europe. Class 1 product, Covers EMC/LV requirements, CE WEEE and ROHS compliant Ballast EN61347, EN 55015, EN60929 EN61547 EN 61000-3-2.

VOLTAGE

220v-240v AC 50-60Hz, Start up amps 0.98 operating amps 0.07- 0.30 dependant on wattage.

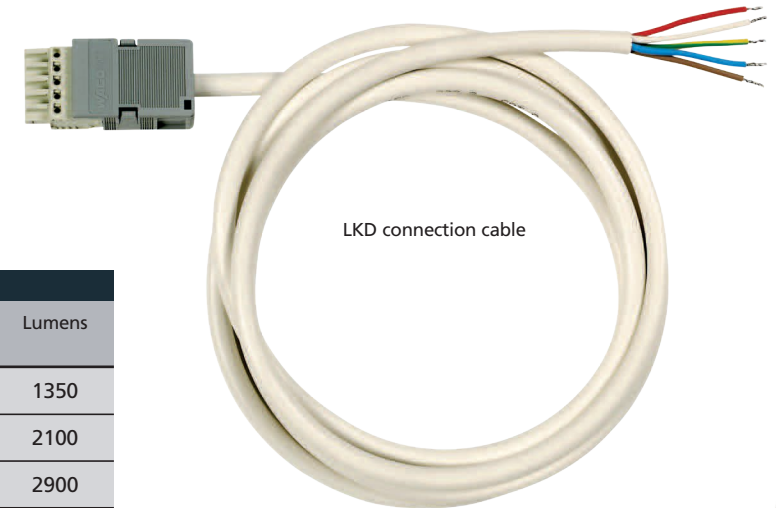

LKD connection cable

T5 LKD Batten		
Product Code	Overall Length	Lumens
T5B 14w LKD	620mm	1350
T5B 21w LKD	920mm	2100
T5B 28w LKD	1220mm	2900
T5B 35w LKD	1520mm	3650

T5 LKD Batten HO Version		
Product Code	Overall Length	Lumens
T5B 24w LKD	620mm	2000
T5B 39w LKD	920mm	3500
T5B 54w LKD	1220mm	5000
T5B 80w LKD	1520mm	6500

For dimmable option, add protocol version 1-10v, DSI or DALI to product code.

Incorrect wiring/programming will invalidate all warranties. Coloured sleeves are optional. Please note coloured sleeves are not recommended for use on HO Lamps.

For Product support Freecall 1800 733 113 or Email info@yld.com.au